

PCC #: _____

BILL TO: _____

ADDRESS: _____

SHIP TO: SAME AS BILLING _____

ADDRESS: _____

SHIPPING: GROUND (FXGD) STANDARD 2 DAY (FX2D)

OVERNIGHT: PRIORITY (FX1D) 1st OVERNIGHT (FX1A)

OTHER: _____

CLINICIAN: _____

CELL #: _____

PATIENT ID: _____

HEIGHT: _____ **WEIGHT:** _____ **AGE:** _____

LEFT RIGHT **TERMINAL DEVICE:** _____

WRIST UNIT: _____ **ELBOW UNIT:** _____

SHOULDER: _____ **LAMINATION/GLOVE COLOR:** _____

NG ENCOUNTER #: _____


MEASUREMENT DATE: _____

IN-OFFICE REQUEST DATE & TIME: _____


PROJECT NEWTON (Credit applied on prior auth. denial, details on One Hanger)

HFN: ANAHEIM KANSAS ORLANDO PHOENIX

PATIENT MEASUREMENTS Please complete all necessary measurements:

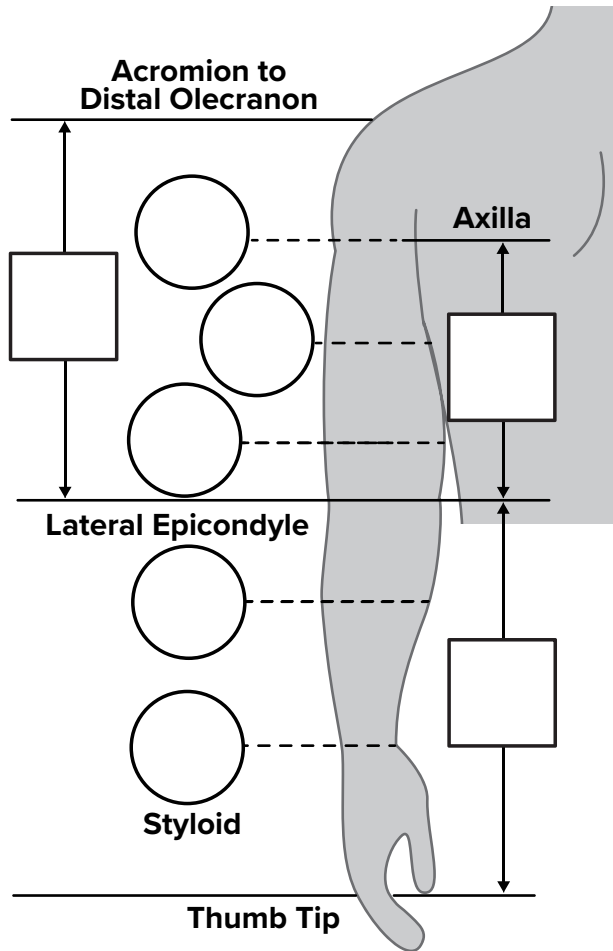

IMPORTANT:
Mark All Bony Prominences on Cast

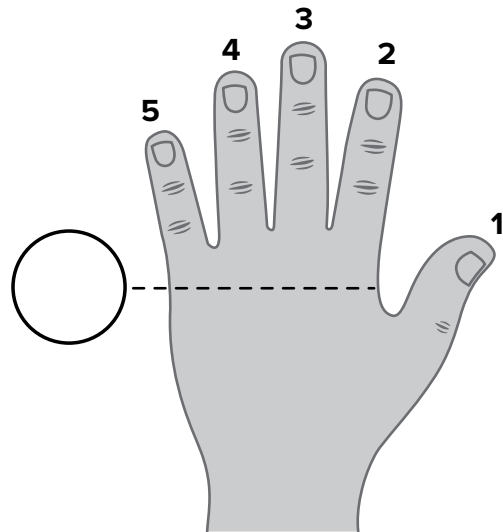

NOTES

CLINICIAN: _____ **PATIENT ID:** _____

PREFERRED METHOD OF CONTACT CELL TEXT EMAIL NG MOBILE _____

SOCKET

STANDARD

- Flexible socket
- Valve at distal end

OPTIONS

- Laminated (4 Nyglass & Dacron inner) & removable
- Lamination as part of humeral section
- Custom silicone socket
- Lamination over socket
- No valve
- Pull tube

HUMERAL LAMINATION

STANDARD

- Laminated, 6 layers Nyglass
- Carbon tape at humeral turntable
- 2 finishing layers

OPTIONS

- Carbon lamination (1 Carbon, 1 Nyglass, 1 Carbon)
- Carbon tape throughout
- Printed material as final
- Oval hole in posterior for E-Series elbows

FOREARM LAMINATION

STANDARD

- Forearm provided by manufacturer

OPTIONS

- Laminated, 6 layers Nyglass
- Carbon lamination (1 Carbon, 1 Nyglass, 1 Carbon)
- Carbon tape throughout
- Custom lamination over forearm supplied by vendor
- Printed material as final

ALIGNMENT

STANDARD

- As marked on socket or follow test socket
- If not marked or no test socket, then elbow at perpendicular to socket

OPTIONS

- Elbow Flex or Ext at _____°
- Elbow AB or AD duct _____°
- Move elbow Anterior or Posterior: _____ mm/"
- Move elbow Medial or Lateral: _____ mm/"

CABLING*

STANDARD

- Spectra with Teflon
- Ball terminal & hanger attached
- TRS ferrule in housing
- Plastic covering over housing
- Leather lift assist

OPTIONS

- Hosmer metal ferrule
- HD Steel cable
- Standard cable w/Teflon
- Standard cable w/o Teflon
- Hook to hand cable
- No covering over housing
- Hanger NOT attached
- No cabling requested
- Change lift assist to: _____

HARNESS*

STANDARD

- Fig. 8 with Large NW ring
- Four-Bar buckles
- Anterior elastic strap and 1/2" Dacron for elbow lock
- Lateral support anterior to acromion

OPTIONS

- Dual NW ring
- BAHA
- Silicone axilla (Hosmer)
- Change NW ring size: _____
- Chest strap (clinician to provide fabrication instruction)
- TRS neoprene on axilla loop
- Plastic covering on axilla loop
- No harness requested

ELBOW

OPTIONS

- Lamination over elbow ball to match forearm
- Lift assist for E-Series
- AFB for non-Ergo arm

***Detail Harness and Cabling needs and operation of device in notes section below.**

Detail any other changes from the Standards listed above: _____

TURNAROUND TIMES

To review current projected turnaround times for fabrication sites visit the [Daily HFN Capacity Webpage](#).