

**PCC #:** \_\_\_\_\_

**BILL TO:** \_\_\_\_\_

**ADDRESS:** \_\_\_\_\_

**SHIP TO:** ☐ SAME AS BILLING \_\_\_\_\_

**ADDRESS:** \_\_\_\_\_

**SHIPPING:** ☐ GROUND (FXGD) ☐ STANDARD 2 DAY (FX2D)

OVERNIGHT: ☐ PRIORITY (FX1D) ☐ 1st OVERNIGHT (FX1A)

☐ OTHER: \_\_\_\_\_

**CLINICIAN:** \_\_\_\_\_

**CELL #:** \_\_\_\_\_

**PATIENT ID/NAME:** \_\_\_\_\_

**HEIGHT:** \_\_\_\_\_ **WEIGHT:** \_\_\_\_\_ **AGE:** \_\_\_\_\_

**DIAGNOSIS:** \_\_\_\_\_

**AFFECTED SIDE (Check One):**

☐ LEFT ☐ RIGHT or ☐ BILATERAL: SYMMETRICAL ☐ YES ☐ NO

**NG ENCOUNTER #:** \_\_\_\_\_

**MEASUREMENT DATE:** \_\_\_\_\_




**IN-OFFICE REQUEST DATE & TIME:** \_\_\_\_\_

☐ PROJECT NEWTON (Credit applied on prior auth. denial, details on One Hanger)

**HFN:** ☐ PHOENIX ☐ ORLANDO ☐ CROMWELL ☐ CHICAGO ☐ HOUSTON ☐ OTHER \_\_\_\_\_

**If a Discrepancy Exists, Go By** ☐ Impression ☐ Measurements **Units of Measure** ☐ Millimeters ☐ Inches


## PATIENT MEASUREMENTS (REQUIRED)

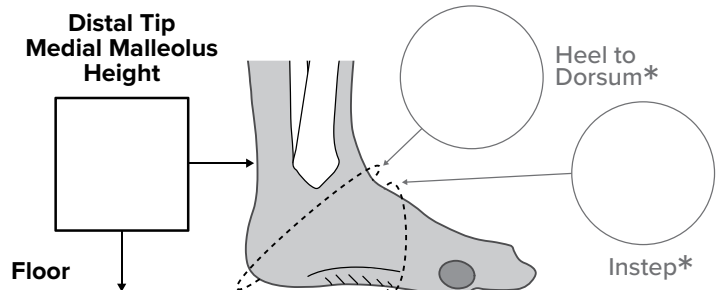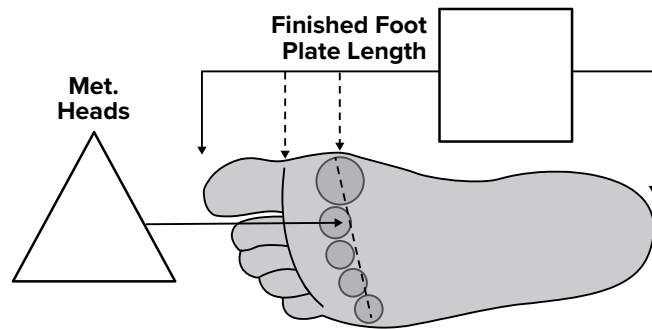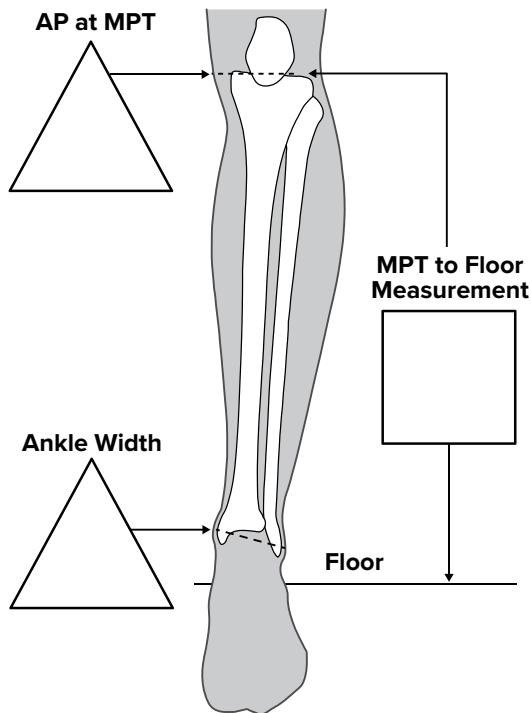

\* Required Measurements for Floor Reaction Designs

## ☐ ALIGNMENT CASTING BLOCK/TUNING (Optional)

**Alignment Casting Block Used?** ☐ Yes\* ☐ No **\* Best Practice: Casting block improves design accuracy and efficiency.**

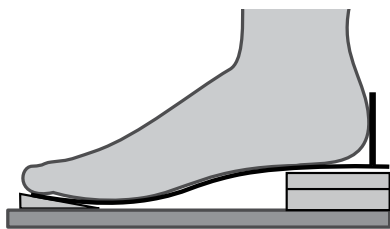

**Ankle Angle**

☐ As Casted ☐ Correct to: \_\_\_\_\_°

**Casted on:**

Cast Block Height: \_\_\_\_\_ & Toe Ramp: \_\_\_\_\_

**External Heel Wedge**

☐ Attached ☐ Unattached

Shoe Heel Height = \_\_\_\_\_

**Set Heel Wedge to:**

☐ Calculate from Cast Block Setup

☐ Set to SVA of: \_\_\_\_\_°

☐ Other \_\_\_\_\_°

• **Calculated** = Casted Heel – Shoe Heel

• **SVA** = (Set AFO to SVA first) AFO Heel – Shoe Heel

• **Other** = Clinician Specified Amount

## ☐ DIGITAL SCAN INPUT REQUIREMENTS

**SCAN TYPE** ☐ Split/Inside Cast ☐ Outside Cast (Preferred)

Positive Model: ☐ Unmodified ☐ Modified

☐ Direct Patient

**MEASUREMENTS** Average Cast Thickness \_\_\_\_\_ mm

Outside Cast Forefoot ML \_\_\_\_\_ Outside Cast Ankle ML \_\_\_\_\_

**CLINICIAN:** \_\_\_\_\_ **PATIENT ID/NAME:** \_\_\_\_\_

**PREFERRED METHOD OF CONTACT** ☐ CELL ☐ TEXT ☐ EMAIL ☐ MICROSOFT TEAMS \_\_\_\_\_

## DEVICE

### AFO DESIGN

☐ [Floor Reaction \(Top Entry\)](#) (F1960) ☐ [Floor Reaction \(Post.Entry\)](#) (F1960)  
☐ [PTB](#) (F1960) ☐ [Anterior Removable Shell](#) (F2340)

**Articulated:** ☐ Yes ☐ No

### Corrected Ankle Position

☐ **Neutral** ☐ As Is (Rigid) Other: ☐ DF \_\_\_\_\_ ° ☐ PF \_\_\_\_\_ °

### [Final Corrected Forefoot Position](#)

Right: ☐ **Neutral** ☐ As Is ☐ Other \_\_\_\_\_

Left: ☐ **Neutral** ☐ As Is ☐ Other \_\_\_\_\_

### [Final Corrected Hindfoot Position](#)

Right: ☐ **Neutral** ☐ As Is ☐ Other \_\_\_\_\_

Left: ☐ **Neutral** ☐ As Is ☐ Other \_\_\_\_\_

### [Modifications](#) ☐ Rigid ☐ Flexible

☐ [Standard](#) ☐ [Tone Reduction](#) ☐ [ST Mod](#)

☐ [Intrinsic Heel Skive/Mod](#) \_\_\_\_\_ ° ☐ Medial ☐ Lateral

**Trough:** ☐ Full ☐ Leg Only ☐ Ankle Only (Dorsal Web) ☐ Foot Only

☐ Additional Build Ups/Reductions (detail in notes section)

## DESIGN

**Ankle Joints:** ☐ None ☐ Unfinished: Do NOT Articulate

Tamarack Optns: ☐ Neutral Dorsi Assist: ☐ 75-Mld ☐ 85-Mod ☐ 95-Strng

☐ Other \_\_\_\_\_

### Posterior Stops

☐ Plastic Block ☐ Becker 795 ☐ Becker 655 ☐ PAS ☐ Snap Stop

## TRIMLINES

### Midfoot

☐ **Standard** ☐ Mid ☐ Min ☐ Dorsal Wrap

### Forefoot

☐ **Standard** ☐ Ext. Lat ☐ Ext Med ☐ Other \_\_\_\_\_

### Footplate

☐ Met ☐ Sulcus ☐ Full

### [Varus/Valgus Prevention](#)

Right: ☐ Varus ☐ Valgus ☐ Pad Supramalleolar Extension

Left: ☐ Varus ☐ Valgus ☐ Pad Supramalleolar Extension

☐ Ext. Heel Post (F0040) \_\_\_\_\_ ° ☐ Med ☐ Lat ☐ Plastic ☐ Crepe

☐ Ext. Forefoot Post (F0040) \_\_\_\_\_ ° ☐ Med ☐ Lat ☐ Plastic ☐ Crepe

### Proximal Flare

☐ Anterior Superior ☐ Anterior Inferior ☐ Posterior

**NOTES** \_\_\_\_\_

## THERMOFORMING

### Plastic Type

☐ **Polypropylene** ☐ Copolymer ☐ Modified Polyethylene

### Thickness

☐ 3/32" ☐ 1/8" ☐ **5/32"** ☐ 3/16" ☐ 1/4" ☐ Other \_\_\_\_\_

## TRANSFER (F0053) / PLASTIC COLOR

☐ Anterior ☐ Posterior ☐ Both

Option 1 \_\_\_\_\_ Option 2 \_\_\_\_\_

### Reinforcement

☐ Corrugation (F2600) ☐ Compcore (F0051) ☐ Other \_\_\_\_\_

## PADDING (detail in notes section)

☐ **Aliplast** ☐ Plastazote ☐ Pelite/EVA ☐ Tri-Lam

**Padding Insertion:** ☐ Pre Plastic Pull ☐ **Post Plastic Pull\***

\*Post pull pads thicker than 1/8" are accommodated for in modification process

**Thickness:** ☐ 1/8" ☐ 3/16" ☐ 1/4"

**Location:** ☐ Full Device (F2840) ☐ Calf (F2820) ☐ Full Foot (F2860)

☐ Navicular (F2820) ☐ [Horseshoe/Heel](#) (F2820)

☐ Lateral Malleolus (F2820) ☐ Medial Malleolus (F2820)

## ☐ INNER BOOT (detail optional padding in notes section)

### Material

☐ **Polyethylene** ☐ EVA/Foam ☐ Proflex (F9036) ☐ Other \_\_\_\_\_

**Thickness:** ☐ **3/32"** ☐ 1/8" ☐ 5/32" ☐ Other \_\_\_\_\_

## ANTERIOR SHELL

### Plastic Type

☐ **Polypropylene** ☐ Copolymer ☐ Modified Polyethylene

### Thickness

☐ 3/32" ☐ 1/8" ☐ **5/32"** ☐ 3/16" ☐ 1/4" ☐ Other \_\_\_\_\_

**PADDING** (detail in notes): ☐ **Aliplast** ☐ Plastazote ☐ Pelite/EVA

**Padding Insertion:** ☐ Pre Plastic Pull ☐ **Post Plastic Pull**

**Thickness:** ☐ 1/8" ☐ 3/16" ☐ **1/4"**

## FINISHING ☐ Finished ☐ Unfinished (send straps unattached)

**Fastener:** ☐ **Speedy** ☐ Copper ☐ Chicago

**Anterior Shell Strap:** ☐ Leave Detached ☐ Wrap Around (no chafe)

☐ **Double Chafes (Butterfly Style)** ☐ 1" ☐ **1 1/2"** ☐ 2"

### Ankle Strap

☐ Leave Detached ☐ Chafe Medial ☐ Chafe Lateral ☐ Instep ☐ Fig 8

☐ 1" ☐ 1 1/2"

### Strap Material ☐ **Velcro Only**

☐ Leather Back (F0046) ☐ Dacron Back (F0046) ☐ Other \_\_\_\_\_

### Strap Color

☐ Black ☐ **White** ☐ Pink ☐ Red ☐ Beige ☐ Green ☐ Purple ☐ Blue

### Non-Skid Surface (F0036)

☐ Right ☐ Left ☐ Bilateral **Glued:** ☐ Yes ☐ No

## TURNAROUND TIMES

To review current projected turnaround times for fabrication sites visit the [Daily HFN Capacity Webpage](#).