

PCC #: _____

BILL TO: _____

ADDRESS: _____

SHIP TO: ☐ SAME AS BILLING _____

ADDRESS: _____

SHIPPING: ☐ GROUND (FXGD) ☐ STANDARD 2 DAY (FX2D)

OVERNIGHT: ☐ PRIORITY (FX1D) ☐ 1st OVERNIGHT (FX1A)

☐ OTHER: _____

CLINICIAN: _____

CELL #: _____

PATIENT ID/NAME: _____

HEIGHT: _____ WEIGHT: _____ AGE: _____

DIAGNOSIS: _____

AFFECTED SIDE (Check One):

☐ LEFT ☐ RIGHT or ☐ BILATERAL: SYMMETRICAL ☐ YES ☐ NO

NG ENCOUNTER #: _____

MEASUREMENT DATE: _____


IN-OFFICE REQUEST DATE & TIME: _____

☐ PROJECT NEWTON (Credit applied on prior auth. denial, details on One Hanger)

HFN: ☐ KANSAS ☐ ORLANDO ☐ PHOENIX


If a Discrepancy Exists, Go By ☐ Impression ☐ Measurements **Units of Measure** ☐ Millimeters ☐ Inches

PATIENT MEASUREMENTS (REQUIRED)

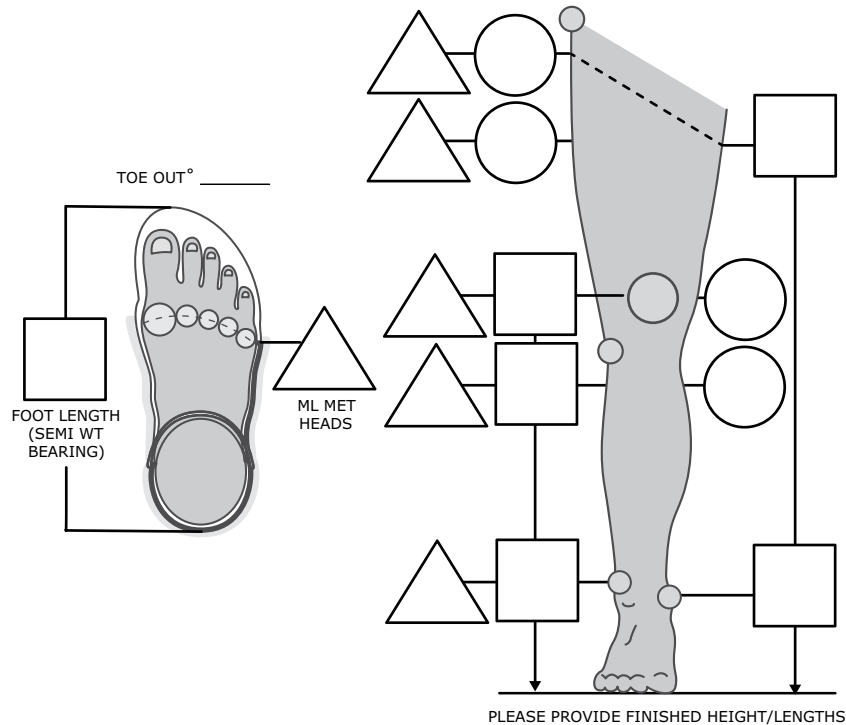

☐ ALIGNMENT CASTING BLOCK/TUNING (Optional)

Alignment Casting Block Used? ☐ Yes* ☐ No *Best Practice: Casting block improves design accuracy and efficiency.

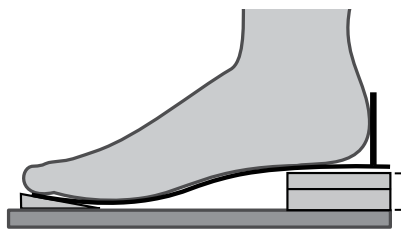

Ankle Angle

☐ As Casted ☐ Correct to: _____°

Casted on:

Cast Block Height: _____ & Toe Ramp: _____

External Heel Wedge

☐ Attached ☐ Unattached

Shoe Heel Height = _____

Set Heel Wedge to:

☐ Calculate from Cast Block Setup

☐ Set to SVA of: _____°

☐ Other _____°

• **Calculated** = Casted Heel – Shoe Heel

• **SVA** = (Set AFO to SVA first) AFO Heel – Shoe Heel

• **Other** = Clinician Specified Amount

☐ DIGITAL SCAN INPUT REQUIREMENTS

SCAN TYPE ☐ Split/Inside Cast ☐ Outside Cast (Preferred)

Positive Model: ☐ Unmodified ☐ Modified

☐ Direct Patient

MEASUREMENTS Average Cast Thickness _____ mm

Outside Cast Forefoot ML _____ Outside Cast Ankle ML _____

CLINICIAN: _____ **PATIENT ID/NAME:** _____

PREFERRED METHOD OF CONTACT ☐ CELL ☐ TEXT ☐ EMAIL ☐ MICROSOFT TEAMS _____

DEVICE

Options

☐ Single Upright ☐ Double Upright **(CORRECTED TRACING IS REQUIRED)**

Modifications

☐ **Standard** ☐ [Tone Reduction](#) ☐ [ST Mod](#)

☐ [Intrinsic Heel Mod](#) _____° ☐ Medial ☐ Lateral

☐ Additional Build Ups/Reductions

Heel Height: ☐ None ☐ Other _____

Corrected Ankle Position

☐ **Neutral** ☐ As Is Other: ☐ DF _____° ☐ PF _____°

[Final Corrected Forefoot Position](#)

Right: ☐ **Neutral** ☐ As Is ☐ Other _____

Left: ☐ **Neutral** ☐ As Is ☐ Other _____

[Final Corrected Hindfoot Position](#)

Right: ☐ **Neutral** ☐ As Is ☐ Other _____

Left: ☐ **Neutral** ☐ As Is ☐ Other _____

DESIGN

Material

☐ AL ☐ SS ☐ TI

Bar Size

☐ 1/4 x 3/4" ☐ 1/4 x 5/8" ☐ 3/16 x 1/2" ☐ 3/16 x 3/4"

☐ 3/16 x 5/8" ☐ 1/8 x 1/2" ☐ Other _____

Pre-Set

☐ Pins ☐ Springs ☐ DF _____° ☐ PF _____°

Stirrup

☐ Solid ☐ Solid-Extended ☐ Solid-White ☐ Split ☐ UCBL

☐ Other _____

Ankle Joints

☐ DAAJ ☐ Free Motion ☐ Limited Action ☐ Dorsi Assist

☐ Other _____

DESIGN (continued)

Knee Joints

☐ Bail Lock ☐ Drop Lock ☐ Cam Lock ☐ Dial Lock

☐ Step Lock ☐ Spring Lever Lock ☐ Ball Retainers

☐ Trigger Release ☐ Posterior Offset ☐ Polycentric

Finish Options

☐ Growth Extensions ☐ Tibial Torsion Spreader Bar _____°

FINISHING

Straps

☐ Eyelets ☐ Calf Lacer ☐ Thigh Lacer ☐ Instep

☐ PTB ☐ POS Check ☐ 4-Buckle ☐ 5-Buckle

☐ T Strap ☐ Medial ☐ Lateral

☐ Other _____

Strap Material

☐ Leather Back (F0046) ☐ Dacron Back (F0046) ☐ Other _____

Strap Color

☐ Black ☐ White ☐ Pink ☐ Red

☐ Beige ☐ Green ☐ Purple ☐ Blue

Shoes

☐ Heel Lift _____

☐ Heel & Sole Lift _____

☐ Medial Wedge _____

☐ Lateral Wedge _____

☐ Steel Shank _____

☐ Other _____

NOTES

TURNAROUND TIMES

To review current projected turnaround times for fabrication sites visit the [Daily HFN Capacity Webpage](#)